


## Grille Installation

1. Use wood bar to insert metal clips into indicated locations. The flat horizontal leg of the clip should be set on the glass and carefully pushed in between the sash frame and the glass. Push lip completely in until the vertical leg touches the frame.


2. Push grille in against one side of sash and "pivot" grille in against glass.

3. To remove grille, push grille against one side of sash and "pivot" grille opposite grille side out.

■ Approximate locations

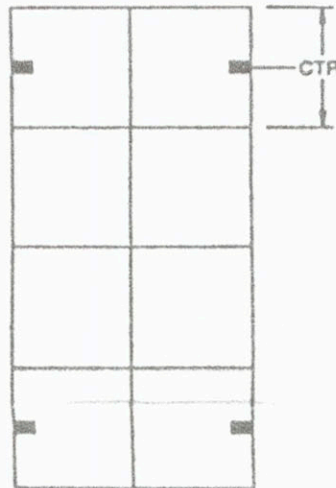

### DH / SL

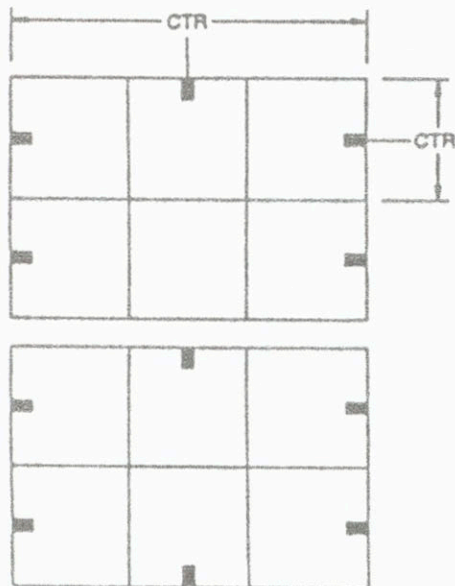

### CSMT / AWN / PATIO

